




## Double BALL BEARINGS CO, LTD

35 mm x 72 mm x 17 mm NTN 6207ZZ deep groove ball bearings

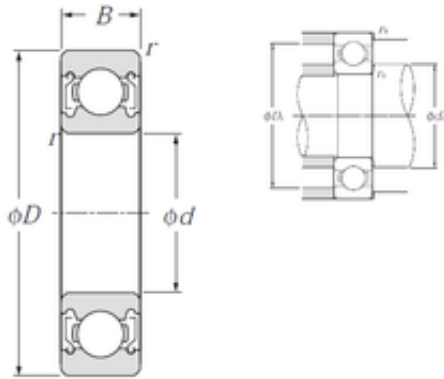

Bearing No. 6207ZZ

6207ZZ Bearing 2D drawings and 3D CAD models

Size	35x72x17 mm
Bore Diameter	35 mm
Outer Diameter	72 mm
Width	17 mm
d	35 mm
D	72 mm
B	17 mm
C	17 mm
rn	0,5 mm
r min.	1,1 mm
da min.	41,5 mm
da max	45 mm
Da max.	65,5 mm
ra max.	1 mm
Weight	0,288 Kg
Basic dynamic load rating (C)	25,7 kN
Basic static load rating (C0)	15,3 kN
(Grease) Lubrication Speed	9 800 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	0692314635599
Product Group	B00308



## Double BALL BEARINGS CO, LTD

Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	35MM Bore; 72MM Outside Diameter; 17MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6207ZZ
Weight / LBS	0.626
Outer Race Width	0.669 Inch   17 Millimeter
Outside Diameter	2.835 Inch   72 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Bore	1.378 Inch   35 Millimeter
bore diameter:	35 mm
precision rating:	ISO Class 0



## Double BALL BEARINGS CO, LTD

outside diameter:	72 mm
finish/coating:	Uncoated
overall width:	17 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	17 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	17 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	9800 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	11000 RPM
dynamic load capacity:	25700 N
series:	62
static load capacity:	15300 N
manufacturer product page:	<a href="#">Click here</a>